

# 6000-ME (5 PLY)

## LSL CORE FOR INTENSIVE USE

- ❶ **STILES:** 7/8" (22 mm) wide hardwood, matched with faces. **Bonded to core**
- ❷ **TOP AND BOTTOM RAILS:** Integrated
- ❸ **CORE:** Laminated strand lumber (LSL). Complies with ANSI 1.5.4 (UFF)
- ❹ **FACES:** Wood veneer (choice of face veneers; 2 ply plywood), hardboard panel or plastic laminate glued to composite crossband

**LOCK BLOCK:** Integrated

**GLUE:** Type 1 PVA Cross link (UFF)

**INTERIOR USE**

**WARRANTY: LIFETIME**

### OPTIONS

| 20 minute fire rating, specify 6020 ME


| Wood veneer glued to veneer plywood (3 ply plywood)

| Also available: 7/8" (22 mm) rails for SCLC 5/SCLC 7 (AWI/AWMAC) compliance

| \*\*\* To get I.E.Q. 4.4, specify UFF wood veneer faces

### NOTE


| Dimensions are nominal before trimming.

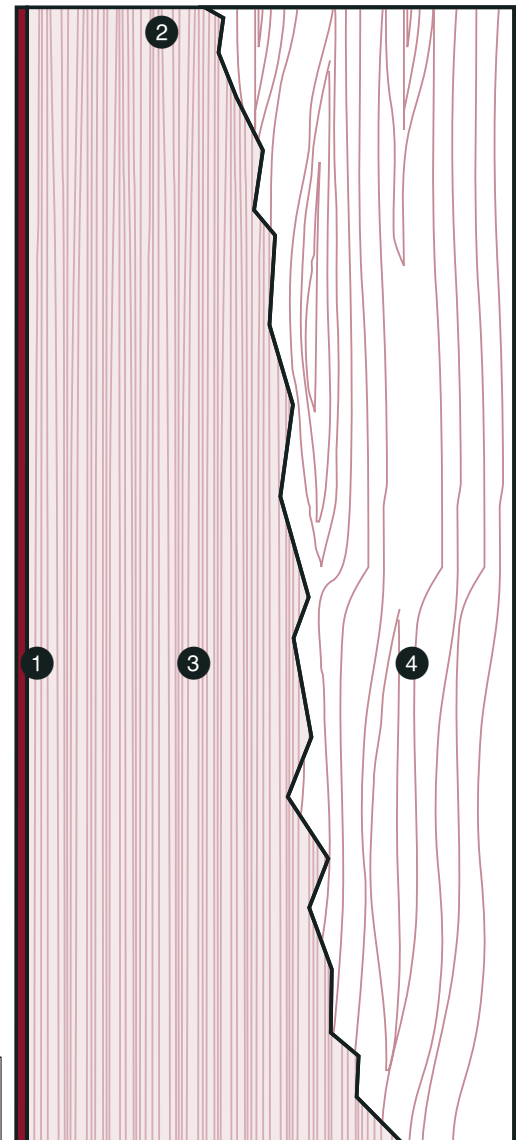

<b>LEED</b> ELIGIBLE CREDITS	4.1		4.2		M.R.		I.E.Q.	
	✓	✓	✓	✓	6.0	7.0	4.4 (UFF)	***

Standards meet or exceed:  
AWS section 9, October 1, 2009,  
W.D.M.A. 1.5.1A 04 and  
CSA 0132.2 90

### ❶ STILES ME

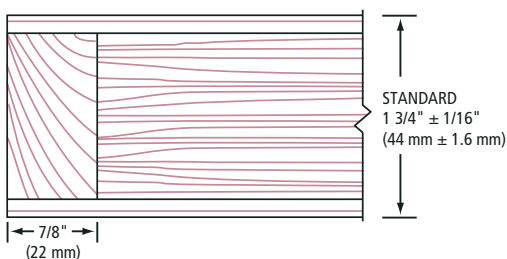

### ❷ INTEGRATED RAILS

