

8600-MO-AF • 8600-ME-AF • 8600-VE-AF (5 PLY)

AGRIFIBRE CORE, FOR INTENSIVE USE

- ❶ **STILES:** Hardwood or laminated strand lumber (LSL) or **1/8" (3 mm)** thick veneer, longitudinally laminated by hot pressing with type 1 structural glue, as per ASTM D5456 93 (LVL), including a **7/8" (22 mm)** piece of hardwood, for a total width of **1 3/16" (30 mm)**:
 - MO:** Manufacturer's choice
 - ME:** Matched with faces
 - VE:** Covered with 1/32" (0.7938 mm) of wood veneer, matched with faces
- ❷ **TOP AND BOTTOM RAILS:** **1 3/16" (30 mm)** in wood or SCL, manufacturer's choice (LVL or LSL)
- ❸ **CORE:** Agrifibre (UFF). **Neutral FSC.**
- ❹ **FACES:** Wood veneer (choice of face veneers: 2 ply plywood), hardboard panel or plastic laminate glued to composite crossband

LOCK BLOCK: Integrated

GLUE: Type 1 PVA Cross link (UFF)

INTERIOR USE

REFERENCE FPC 5/FPC 7 (AWI/AWMAC)

WARRANTY: LIFETIME

OPTIONS

| 20 minute fire rating, specify 8620 MO AF or 8620 ME AF or 8620 VE AF

| Wood veneer glued to veneer plywood (3 ply plywood)

| ** To get M.R. 7.0, specify FSC wood veneer faces

| *** To get I.E.Q. 4.4, specify UFF wood veneer faces

NOTE


| Dimensions are nominal before trimming.




LEED ELIGIBLE CREDITS	M.R.		I.E.Q.				
	4.1	4.2	5.1	5.2	6.0	7.0	4.4 (UFF)
	✓	✓	✓	✓	✓	**	***

Standards meet or exceed:
AWS section 9, October 1, 2009,
W.D.M.A. 1.S.1A 04 and
CSA 0132.2 90

❶ STILES MO/ME

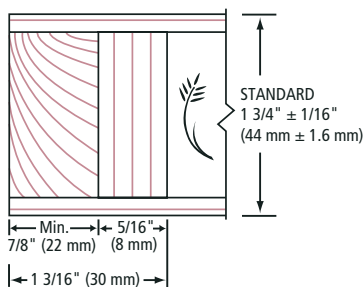

❶ STILES VE

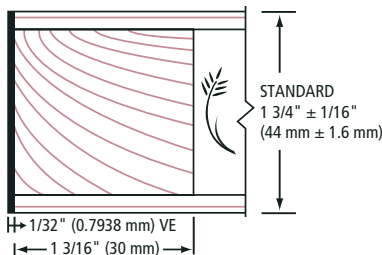

❷ RAILS

