

PC5-MO-AF • PC5-ME-AF • PC5-VE-AF (5 PLY)

AGRIFIBRE CORE

- ❶ **STILES:** Hardwood or structural composite lumber (SCL), including a 7/16" (11 mm) piece of hardwood, for a total width of 1 3/16" (30 mm):
MO: Manufacturer's choice
ME: Matched with faces
VE: SCL covered with 1/32" (0.7938 mm) of wood veneer, matched with faces
Bonded to core
- ❷ **TOP AND BOTTOM RAILS:** 1 3/16" (30 mm) in wood or SCL, manufacturer's choice. **Bonded to core**
- ❸ **CORE:** Agrifibre (UFF). **Neutral FSC.**
- ❹ **FACES:** 2 ply wood veneer (choice of face veneers), hardboard panel or plastic laminate glued to composite crossband

LOCK BLOCK: Integrated

GLUE: Type1 PVA Cross link (UFF)

INTERIOR USE

WARRANTY: LIFETIME

OPTIONS

| For 3 ply plywood, specify PC7 MO AF or PC7 ME AF or PC7 VE AF


| 20 minute fire rating, specify PC520 MO AF/PC720 MO AF or PC520 ME AF/PC720 ME AF or PC520 VE AF/PC720 VE AF

| ** To get M.R. 7.0, specify FSC wood veneer faces

| *** To get I.E.Q. 4.4, specify UFF wood veneer faces

NOTE


| Dimensions are nominal before trimming.

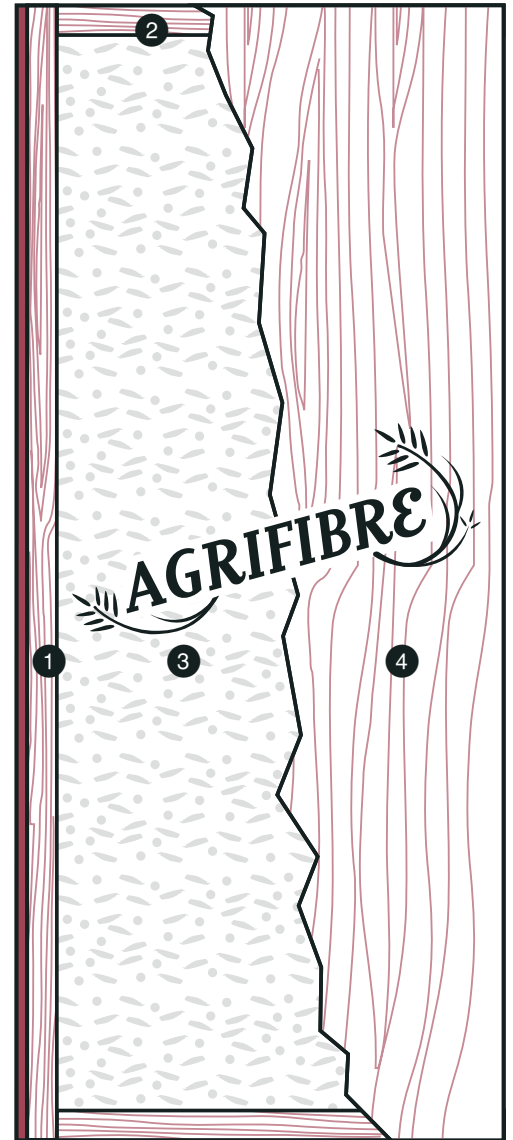


LEED ELIGIBLE CREDITS	M.R.		I.E.Q.				
	4.1	4.2	5.1	5.2	6.0	7.0	4.4 (UFF)
	✓	✓	✓	✓	✓	**	***

Standards meet or exceed:
 AWS section 9, Octobre 1, 2009,
 W.D.M.A. 1.S.1A 04 and
 CSA 0132.2 90

❶ STILES MO/ME

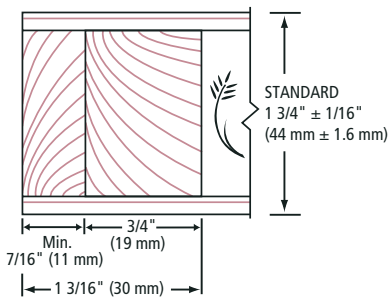

❶ STILES VE

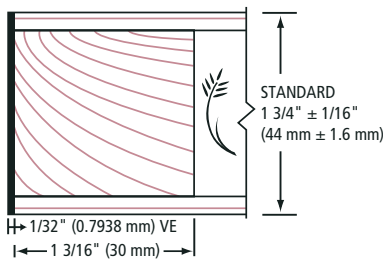

❷ RAILS

