

FR00-ME FRENCH DOOR (5 PLY)

1 PLY LVL CORE, ULTRA HEAVY-DUTY, ANTI-WARPING CONSTRUCTION FOR INTENSIVE USE

- ❶ **STILES:** 1/8" (3 mm) thick veneer, longitudinally laminated by hot pressing with type 1 structural glue, as per ASTM D5456 93 (LVL) or laminated strand lumber (LSL), including a 7/8" (22 mm) piece of hardwood, matched with faces, for a total width of 4 3/16" (107 mm)
- ❷ **TOP AND BOTTOM RAILS:** 1/8" (3 mm) thick veneer, longitudinally laminated by hot pressing with type 1 structural glue, as per ASTM D5456 93 (LVL) or laminated strand lumber (LSL), for a total width of 3 5/16" (85 mm)
- ❸ **CORE:** 1/8" (3 mm) thick veneer, longitudinally laminated by hot pressing with type 1 structural glue, as per ASTM D5456 93 (LVL) or laminated strand lumber (LSL) LVL is **FSC certified** (UFF)
- ❹ **FACES:** Wood veneer (choice of face veneers; 2 ply plywood), hardboard panel or plastic laminate glued to composite crossband

LOCK BLOCK: Integrated

GLUE: Type 1 PVA Cross link (UFF)

INTERIOR USE only

WARRANTY: LIFETIME

OPTIONS

| Fire rating not available

| With 1/8" (3 mm) clear glass, 1/4" (5 mm) clear glass with 1" (25 mm) side bevel, 1/8" (3 mm) frosted GLUE CHIP or MOROCCO

| Desired number of glass units

For our standard 15 glass units, specify FR15

For 10 or 12 glass units, specify FR10 or FR12

For 18, 20 or 24 glass units, specify FR18, FR20 or FR24

| Wood veneer glued to veneer plywood (3 ply plywood)

| Glass coated with transparent protective film for finishing


| ** To get MR 70, specify FSC wood veneer faces and FSC core

| *** To get I E Q 4 4, specify UFF wood veneer faces

NOTES: WIDTHS OF:

- 18" (457 mm) and under 5 glass
- 20" (508 mm) to 26" (660 mm) 10 glass
- 28" (711 mm) to 36" (914 mm) 15 glass
- 38" (965 mm) to 48" (1,219 mm) 20 glass


| Dimensions are nominal before trimming

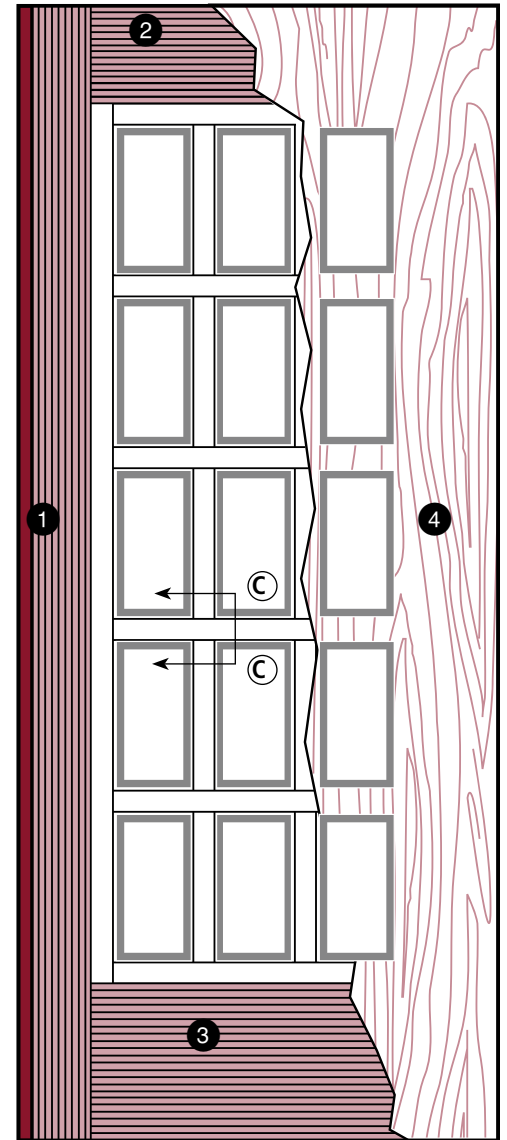

LEED ELIGIBLE CREDITS	M.R.		I.E.Q.	
	4.1	4.2	5.1	5.2
		5.1	5.2	6.0
		✓	✓	**



❶ STILES ME

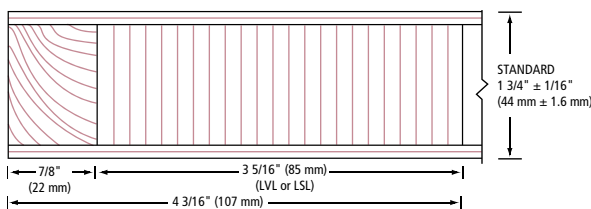

❷ RAILS

