

# 8500-ME-AF (5 PLY)

## AGRIFIBRE CORE, ULTRA HEAVY-DUTY, ANTI-WARPING CONSTRUCTION FOR INTENSIVE USE

- ❶ **STILES:** 1/8" (3 mm) thick veneer, longitudinally laminated by hot pressing with type 1 structural glue, as per ASTM-D5456-93 (LVL), including a 7/8" (22 mm) piece of hardwood, matched with faces, for a total width of 4 3/16" (107 mm)
- ❷ **TOP AND BOTTOM RAILS:** 1/8" (3 mm) thick veneer, longitudinally laminated by hot pressing with type 1 structural glue, as per ASTM-D5456-93 (LVL) or laminated strand lumber (LSL), for a total width of 3 5/16" (85 mm)
- ❸ **CORE:** Agrifibre (UFF). Neutral FSC.
- ❹ **FACES:** Wood veneer (choice of face veneers; 2 ply plywood), hardboard panel or plastic laminate glued to composite crossband

**LOCK BLOCK:** Integrated

**GLUE:** Type1 PVA Cross-link (UFF)

**INTERIOR USE**


**WARRANTY: LIFETIME**

### OPTIONS

- | 20 minute fire rating, specify 8520-ME-AF
- | Wood veneer glued to veneer plywood (3 ply plywood)
- | \*\* To get M.R. 7, specify FSC wood veneer faces
- | \*\*\* To get I.E.Q. 4.4, specify UFF wood veneer faces
- | Autonomy door available, specify 8513-ME-AF

### NOTE


| Dimensions are nominal before trimming.

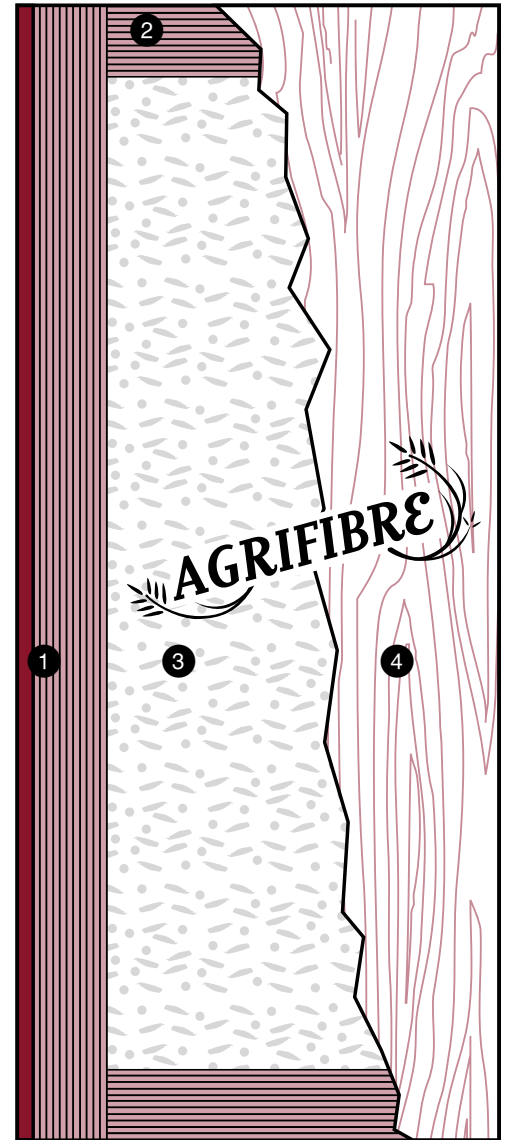

<b>LEED</b> ELIGIBLE CREDITS	M.R.		I.E.Q.				
	4.1	4.2	5.1	5.2	6	7	4.4 (UFF)
	✓	✓	✓	✓	✓	**	***

Standards meet or exceed:  
A.W.I./A.W.M.A.C. section 1300: 2.0 2005,  
W.D.M.A. 1.S.1A-04 and CSA 0132.2 90

### ❶ STILES ME

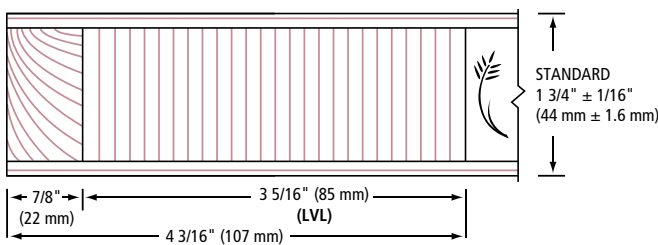

### ❷ RAILS

