

6000-ME (5 PLY)

LSL CORE FOR INTENSIVE USE

- ❶ **STILES:** 7/8" (22 mm) wide hardwood, matched with faces. **Bonded to core.**
- ❷ **TOP AND BOTTOM RAILS:** Integrated.
- ❸ **CORE:** Laminated strand lumber (LSL). Complies with ANSI/W.D.M.A. 1.S.1A (NAUF).
- ❹ **FACES:** Wood veneer (choice of face veneers; 2 ply plywood), hardboard panel or plastic laminate glued to composite cross-band. Available NAUF/FSC.

LOCK BLOCK: Integrated.

GLUE: Type 1 PVA Cross-link (NAUF).

INTERIOR use


WARRANTY: Lifetime

OPTIONS

- | 20 min fire rating, specify 6020-ME.
- | Wood veneer glued to plywood veneer (3 ply plywood) (7 ply door).
- | Also available: 7/8" (22 mm) rails for SCLC-5/ SCLC-7 (AWI/AWMAC) compliance.
- | Available **STC 31** according to sound rating hardware configuration.
- | ** To get a M.R. 7.0 contribution, specify FSC faces and stiles.
- | *** To get IEQ. 4.4, specify NAUF or NAUF/ FSC faces.
- | ◦ Subject to evaluation. Contact us.


NOTE

- | Dimensions are nominal before trimming.

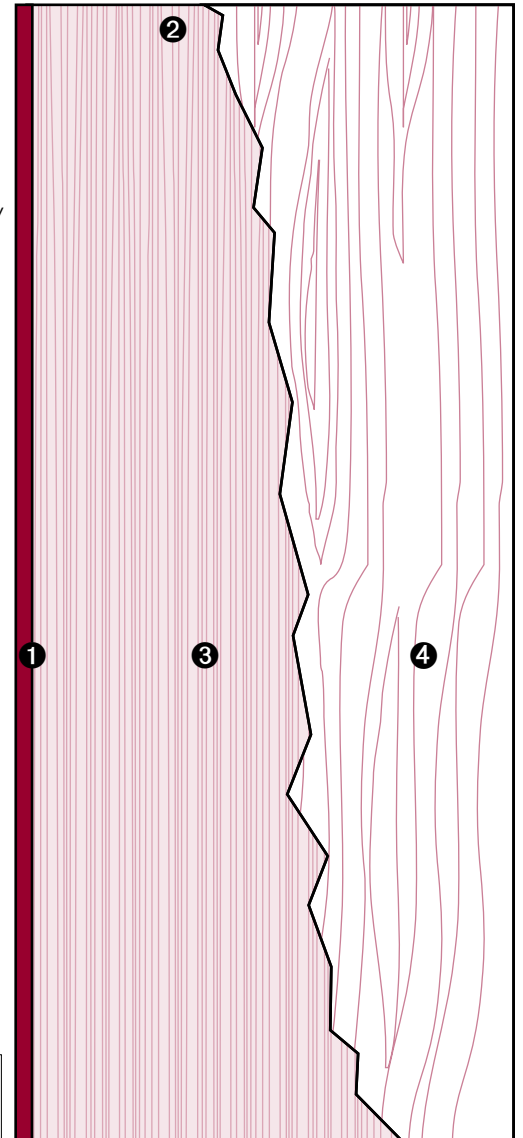

LEED Eligible Credits	MR					IEQ		ID 1	PR 2	Standards meet or exceed: A.W.S. section 9, October 1, 2009; W.D.M.A. 1.S.1A-2013
	3	4	5	6	7	3.2	4.4	mode 2		
			✓		**	○	***	○	○	

❶ STILES ME

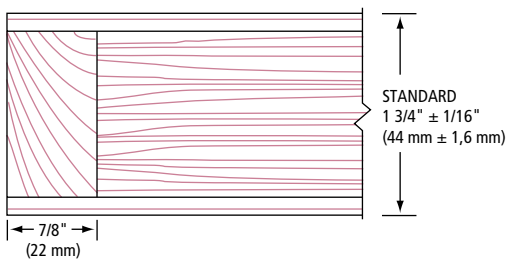

❷ INTEGRATED RAILS

