

7000-ME (5 PLY)

1 PLY LVL CORE, ANTI-WARPING, FOR INTENSIVE USE

- ❶ **STILES:** 7/8" (22 mm) wide hardwood, matched with faces. **Bonded to core.**
- ❷ **TOP AND BOTTOM RAILS:** 7/8" (22 mm) in wood or SCL, (LVL FSC) or laminated strand lumber (LSL), manufacturer's choice. **Bonded to core.**
- ❸ **CORE:** 1/8" (3 mm) thick veneer, longitudinally laminated by hot pressing with type 1 structural glue, as per ASTM-D5456-93 (LVL FSC). LVL is **FSC certified** (NAUF).
- ❹ **FACES:** Wood veneer (choice of face veneers; 2 ply plywood), hardboard panel or plastic laminate glued to composite cross-band. Available NAUF/FSC.

LOCK BLOCK: Integrated.

GLUE: Type 1 PVA Cross-link (NAUF).

INTERIOR use

REFERENCE SCLC-5/SCLC-7 (AWI/AWMAC).


WARRANTY: Lifetime

OPTIONS

- | 20 min fire rating, specify 7020-ME.
- | Wood veneer glued to plywood veneer (3 ply plywood) (7 ply door).
- | 3 5/16" (85 mm) LVL FSC or LSL rails (according to hardware).
- | **STC** sound rating not available.
- | * To optimize M.R. 7.0, specify FSC faces.
- | *** To get IEQ. 4.4, specify NAUF or NAUF/FSC faces.
- | ◦ Subject to evaluation. Contact us.

NOTE

- | Dimensions are nominal before trimming.

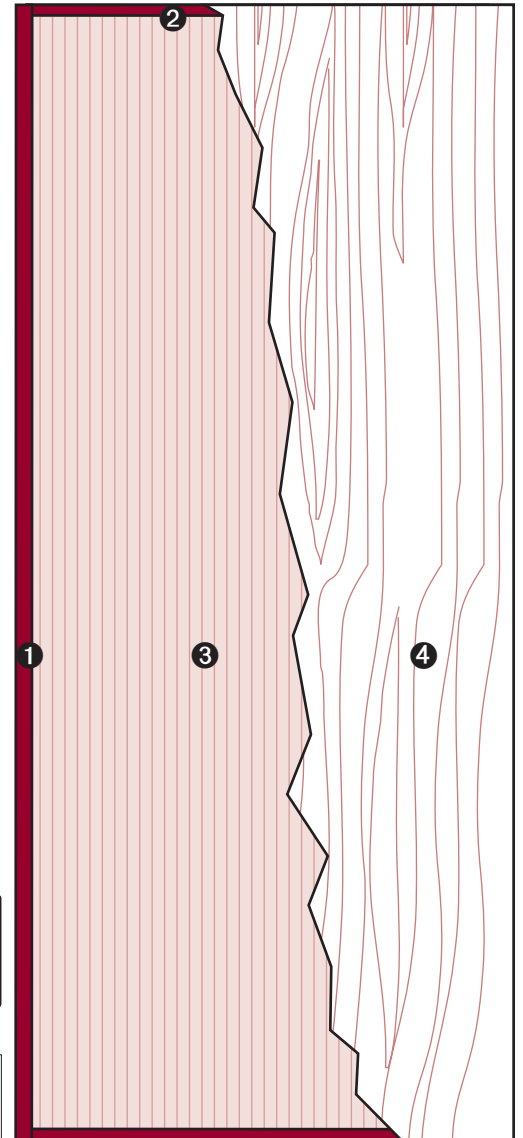


FSC® certified products available on request.

LEED Eligible Credits	MR					IEQ		ID 1	PR 2
	3	4	5	6	7	3.2	4.4	mode 2	
	✓	✓	✓		✓*	○	***	○	○

Standards meet or exceed:
A.W.S. section 9, October 1, 2009;
W.D.M.A. 1.S.1A-2013

❶ STILES ME

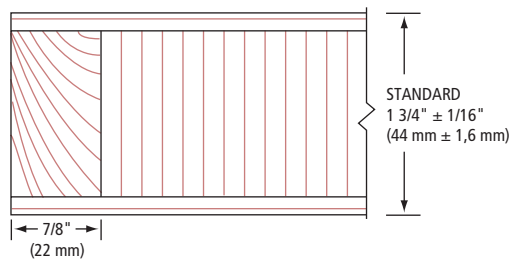

❷ RAILS

