

# LSL CORE

(Extra Heavy Duty)

# 6000-ME / 6020-ME (5 ply)

## LSL (LAMINATED STRAND LUMBER) CORE, FOR INTENSIVE USE

- ❶ **STILES:** 7/8" (22 mm) wide hardwood, matched with faces. **Bonded to core.**
- ❷ **TOP AND BOTTOM RAILS:** Integrated.
- ❸ **CORE:** Laminated strand lumber (LSL).

- ❹ **FACES:** Wood veneer (choice of face veneers; 2 ply plywood), hardboard panel or plastic laminate glued to composite crossband.

**LOCK BLOCK:** Integrated.

**GLUE:** Type 1 PVA Cross-link.

**INTERIOR** use

**WARRANTY:** Lifetime

**NOTE**

Dimensions are nominal before trimming.

**OPTIONS**

🔥 20 min fire rating, specify 6020-ME.

**SOUND RATED OPTION**

Available 31dB depending on configuration of soundproofing hardware.


For optimization, see our soundproof construction.

**LEED CONTRIBUTION OPTIONS**


- | EPD
- | Recycled content
- | FSC
- | NAUF or ULEF (on request)

**PERFORMANCE MEASUREMENT**

- | ANSI/WDMA 1.S.1A
- | ASTM-D1037 and 198-98 (LSL)
- | AWS
- | Intertek WH-ETL
- | NFPA 80

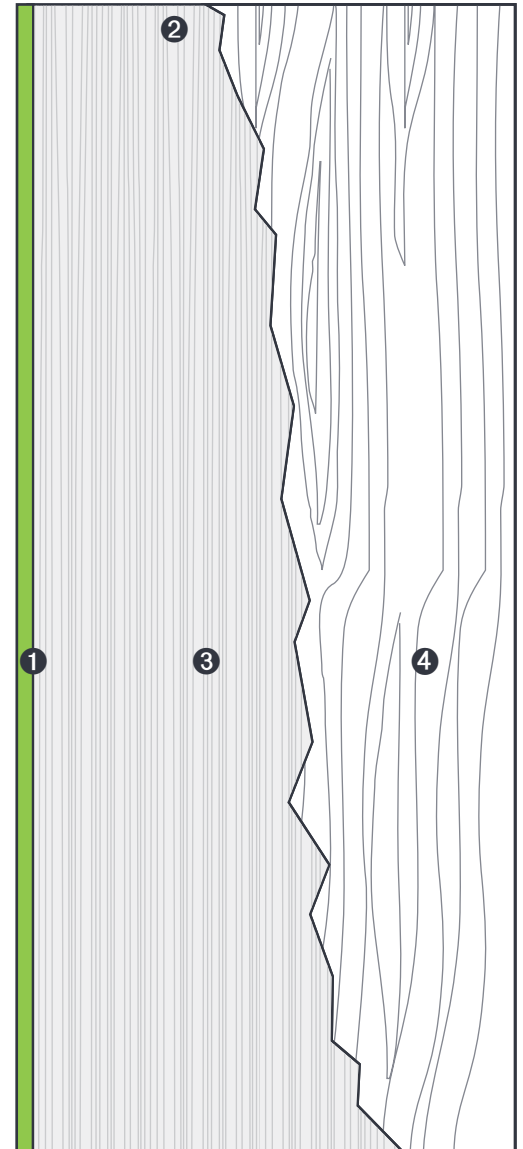

❶ **STILES ME**

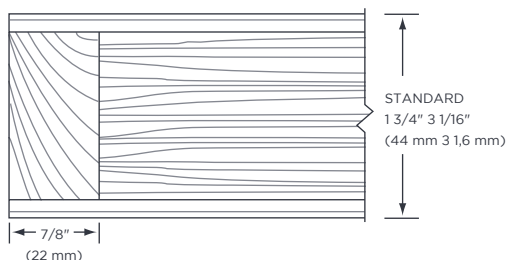

❷ **INTEGRATED RAILS**

