

Evolution Series

Veneer Jamb – Rated (90 minutes)

J1290A

Applied T-Stop Jamb (3/4")

- ❶ 1/8" (3 mm) hardwood edges
- ❷ 3/4" (19 mm) 90 min fire core
- ❸ 1/32" wood veneer faces
- ❹ 5/8" (15.8 mm) x 1 1/2" (38.1 mm) hard - wood door stop (standard)
- ❺ Door
- ❻ Corner rabbet type

SPECIFICATIONS

MINIMUM WALL THICKNESS: 4 5/8" (117 mm)

ASSEMBLY: Please refer to installation instructions

MAXIMUM OPENING

- | Single: 48" (1219 mm) x 96" (2438 mm)
- | Double: 48" (1219 mm) x 96" (2438 mm)

CASING: 5/8" (15 mm) x 2 1/2" (64 mm)

SHIPPING: Unassembled (Knock Down)

WRAPPING: Each frame will be shipped in a cardboard box, with 1/32" (1 mm) foam and bundle wrapped.

Installation instructions and peel-and-stick door bumpers are included (mandatory)

WARRANTY: 3 years

NOTE


- | Mounting brackets are suggested for proper installation.
- | Installation requires a wood casing of 1/4" x 1 1/2" minimum.

OPTIONS

- | Other configurations upon request
- | Mounting brackets available
- | Pre-machining
- | Pre-finishing
- | ◯ Subject to evaluation. Contact us.

LEED CONTRIBUTION OPTIONS

- | Recycled content
- | FSC (on request)
- | NAUF or ULEF (on request)

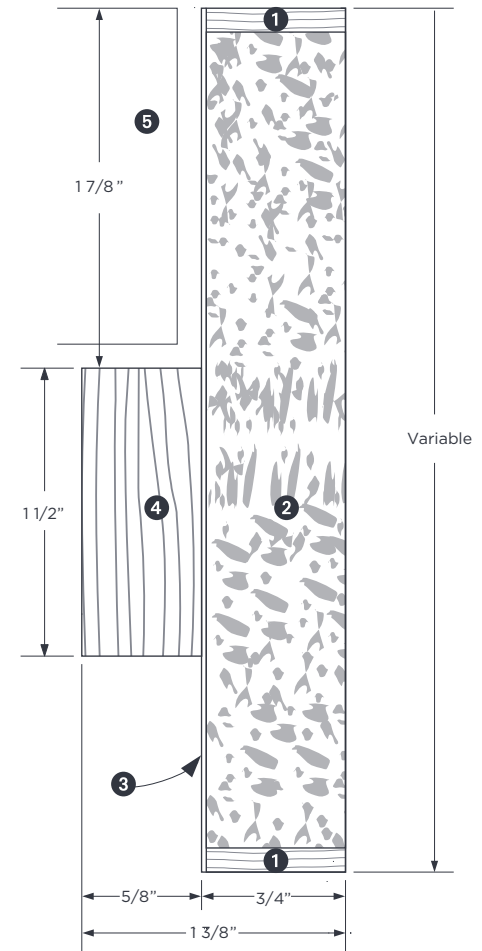

JAMB ASSEMBLY

Head and jamb

