

Tradition Series

Solid-Wood Jamb – Non-Rated

J2300A

SINGLE RABBET JAMB (3/4")

- 1 Hardwood
- 2 Door
- 3 Corner rabbet type

SPECIFICATIONS

MINIMUM WALL THICKNESS: 3 5/8" (92 mm)

MINIMUM JAMB THICKNESS: 1 3/8" (35 mm)

ASSEMBLY: Please refer to installation instructions

MAXIMUM OPENING

| Single: 48" (1219 mm) x 120" (3048 mm)

| Double: 96" (2438 mm) x 120" (3048 mm)

NOTE: Dimensions limitations according to wood species.

CASING: According to your need

SHIPPING: Unassembled (Knock Down)

WRAPPING: Each frame will be shipped in a cardboard box, with 1/32" (1 mm) foam and bundle wrapped.

Installation instructions and peel-and-stick door bumpers are included (mandatory)

WARRANTY: 3 years

NOTE

| Mounting brackets are suggested for proper installation.

OPTIONS

| Other configurations upon request and availability

| Mounting brackets available

| Pre-machining

| Pre-finishing


| Subject to evaluation. Contact us.

LEED CONTRIBUTION OPTIONS

| Recycled content

| FSC (on request)

| NAUF or ULEF (on request)

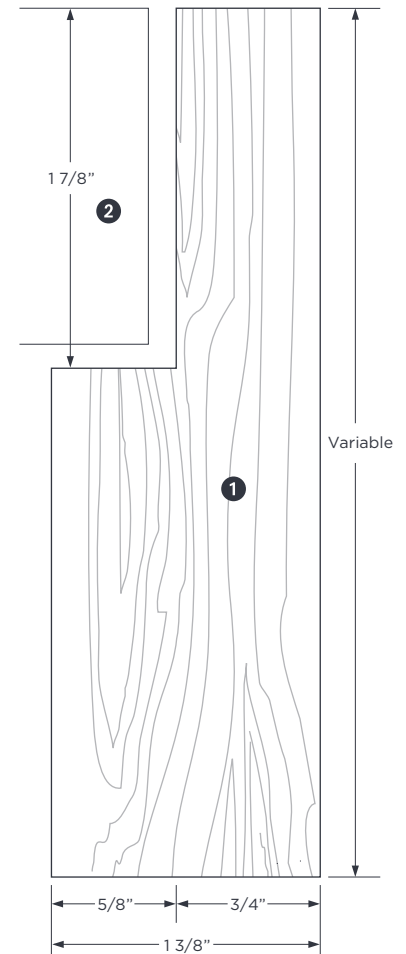

JAMB ASSEMBLY

Head and jamb

