

SOUND RETARDANT DOORS

Our doors are certified and tested by Architectural Testing in accordance with ASTM E 90-02, ASTM E 413-87, ASTM E 1332-90 and ASTM E 2235-03 up to 48" X 96". Oversize constructions available without STC label.

- 1 STILES:** 1 3/16" (30 mm) structural composite lumber with 7/8" (22 mm) hardwood matched with faces.
- 2 RAILS:** 3 5/16" (84 mm) at top and bottom.
- 3 CORE:** Sound dampening core
- 4 FACES:** Wood veneer (choice of face veneers; 2 ply plywood), hardboard panel or plastic laminate glued to composite crossband. Available NAUF/FSC.

LOCK BLOCK (1): Lock materials manufacturer's choice.

GLUE: Type 1 PVA Cross-link (NAUF).

INTERIOR use

SR39 : SEAL COMPONENT KIT no. 10

WARRANTY: 3 years.

OPTIONS

- | 20 min fire rating: specify SR3920.
- | Sound retardant 39STC, specify SR39.
- | Light opening up to 864 sq. inches (vision).
- | Wood veneer glued to plywood veneer (3 ply plywood).

WARNING


- | Use of gaskets other than those tested may affect STC rating. Walls components, frame installation and joints can also impact STC ratings.

IMPORTANT


- | Gaskets system included with STC door configuration.
- | Limited dimensions.
- | For LEED credits, contact us.

NOTE

- | Dimensions are nominal before trimming.

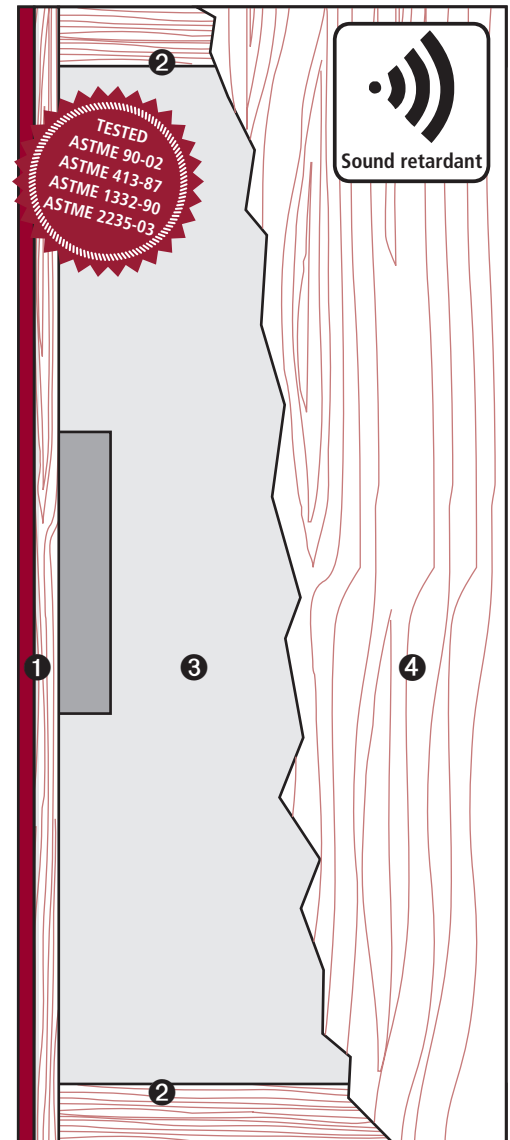

1 STILES ME

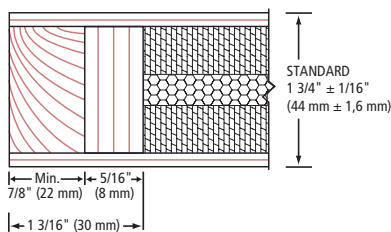

2 RAILS

