

# 7000-ME (5 PLY)

## 1 PLY LVL CORE, ANTI-WARPING, FOR INTENSIVE USE

- ① **STILES:** 7/8" (22 mm) wide hardwood, matched with faces. **Bonded to core**
- ② **TOP AND BOTTOM RAILS:** 7/8" (22 mm) in wood or SCL. **Bonded to core**
- ③ **CORE:** 1/8" (3 mm) thick veneer, longitudinally laminated by hot pressing with type 1 structural glue, as per ASTM-D5456-93 (LVL). LVL is **FSC Certified** (UFF).
- ④ **FACES:** Wood veneer (choice of face veneers; 2 ply plywood), hardboard panel or plastic laminate glued to composite crossband

**LOCK BLOCK:** Integrated

**GLUE:** Type 1 PVA Cross-link (UFF)

**INTERIOR USE**

**REFERENCE** SCLC-5/SCLC-7 (AWI/AWMAC)


**WARRANTY:** LIFETIME

### OPTIONS

- | 20 minute fire rating, specify 7020-ME
- | Wood veneer glued to veneer plywood (3 ply plywood)
- | 3 5/16" (85 mm) LVL rails (hardware)
- | \* To optimize M.R. 7, specify FSC wood veneer faces
- | \*\*\* To get I.E.Q. 4.4, specify UFF wood veneer faces

### NOTE


| Dimensions are nominal before trimming.

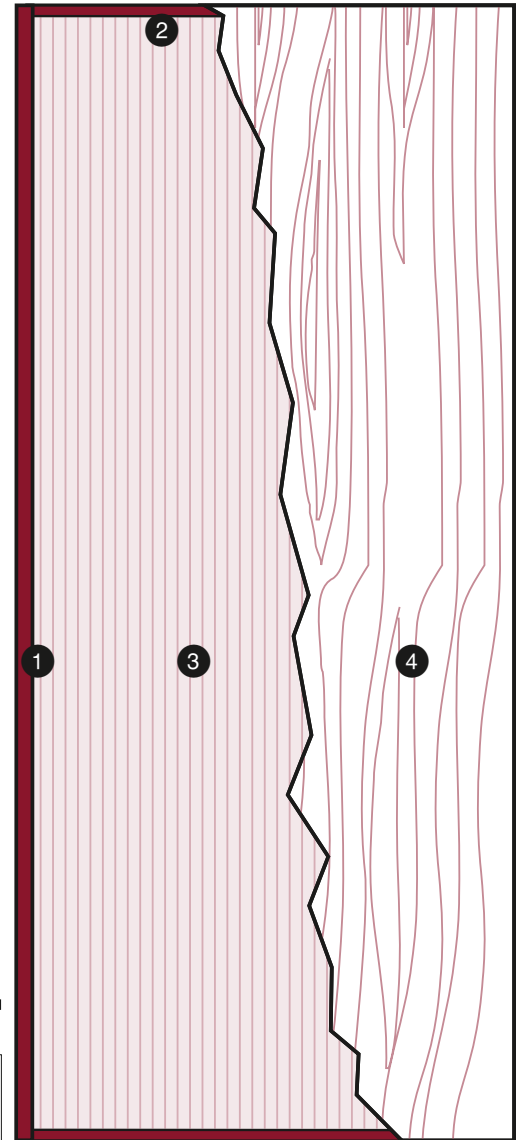

<b>LEED ELIGIBLE CREDITS</b>	M.R.		I.E.Q.				
	4.1	4.2	5.1	5.2	6	7	4.4 (UFF)
			✓	✓		✓*	***

Standards meet or exceed:  
A.W.I./A.W.M.A.C. section 1300: 2.0 2005,  
W.D.M.A. 1.S.1A-04 and CSA 0132.2 90

### ① STILES ME

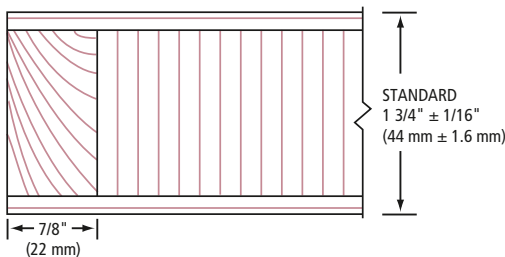

### ② RAILS

