

6000-ME (5 PLY)

LSL CORE FOR INTENSIVE USE

- ❶ **STILES:** 7/8" (22 mm) wide hardwood, matched with faces. **Bonded to core**
- ❷ **TOP AND BOTTOM RAILS:** Integrated
- ❸ **CORE:** Laminated strand lumber (LSL). Complies with ANSI 1.5.4 (UFF)
- ❹ **FACES:** Wood veneer (choice of face veneers; 2 ply plywood), hardboard panel or plastic laminate glued to composite crossband

LOCK BLOCK: Integrated

GLUE: Type 1 PVA Cross-link (UFF)

INTERIOR USE

WARRANTY: LIFETIME

OPTIONS

| 20 minute fire rating, specify 6020-ME


| Wood veneer glued to veneer plywood (3 ply plywood)

| Also available: 7/8" (22 mm) rails for SCLC-5/SCLC-7 (AWI/AWMAC) compliance

| *** To get I.E.Q. 4.4, specify UFF wood veneer faces

NOTE


| Dimensions are nominal before trimming.

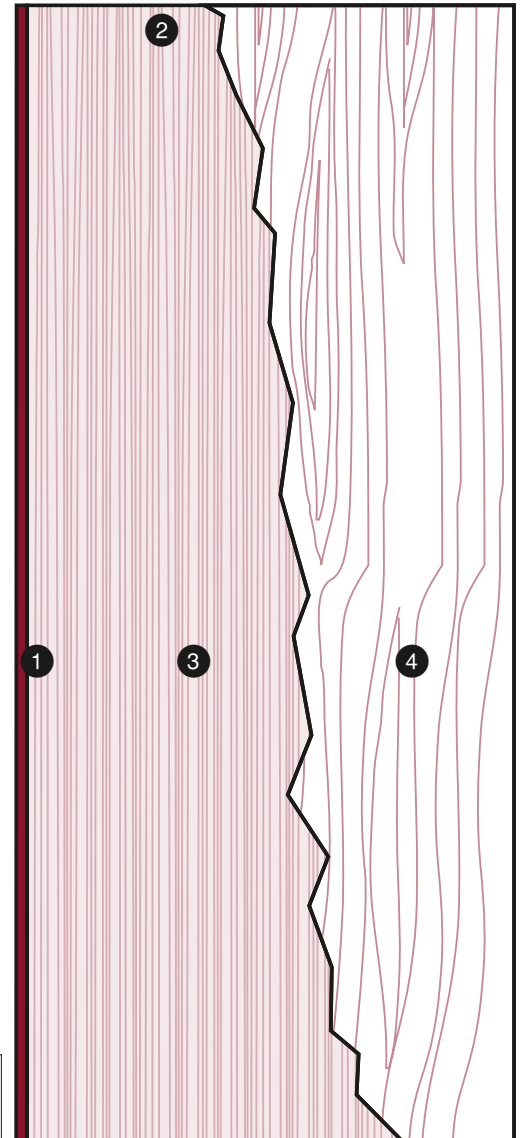

LEED ELIGIBLE CREDITS	4.1		4.2		M.R.		I.E.Q. 4.4 (UFF) ***
	✓	✓	✓	✓	6	7	

Standards meet or exceed:
A.W.I./A.W.M.A.C. section 1300: 2.0 2005,
W.D.M.A. 1.S.1A-04 and CSA 0132.2 90

❶ STILES ME

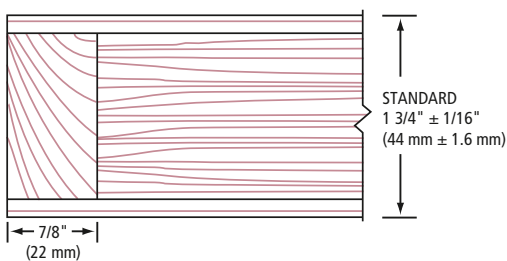

❷ INTEGRATED RAILS

