

# PC5-MO-AF • PC5-ME-AF • PC5-VE-AF (5 PLY)

## AGRIFIBRE CORE

- ❶ **STILES:** Hardwood or structural composite lumber (SCL), including a 7/16" (11 mm) piece of hardwood, for a total width of 1 3/16" (30 mm):
  - MO:** Manufacturer's choice
  - ME:** Matched with faces
  - VE:** SCL covered with 1/32" (0.7938 mm) of wood veneer, matched with faces**Bonded to core**
- ❷ **TOP AND BOTTOM RAILS:** 1 3/16" (30 mm) in wood or SCL, manufacturer's choice. **Bonded to core**
- ❸ **CORE:** Agrifibre (UFF). **Neutral FSC.**
- ❹ **FACES:** 2 ply wood veneer (choice of face veneers), hardboard panel or plastic laminate glued to composite crossband

**LOCK BLOCK:** Integrated

**GLUE:** Type1 PVA Cross-link (UFF)

**INTERIOR USE**

**WARRANTY: LIFETIME**

## OPTIONS

| For 3 ply plywood, specify PC7-MO-AF or PC7-ME-AF or PC7-VE-AF


| 20 minute fire rating, specify PC520-MO-AF/PC720-MO-AF or PC520-ME-AF/PC720-ME-AF or PC520-VE-AF/PC720-VE-AF

| \*\* To get M.R. 7, specify FSC wood veneer faces

| \*\*\* To get I.E.Q. 4.4, specify UFF wood veneer faces


## NOTE

| Dimensions are nominal before trimming.

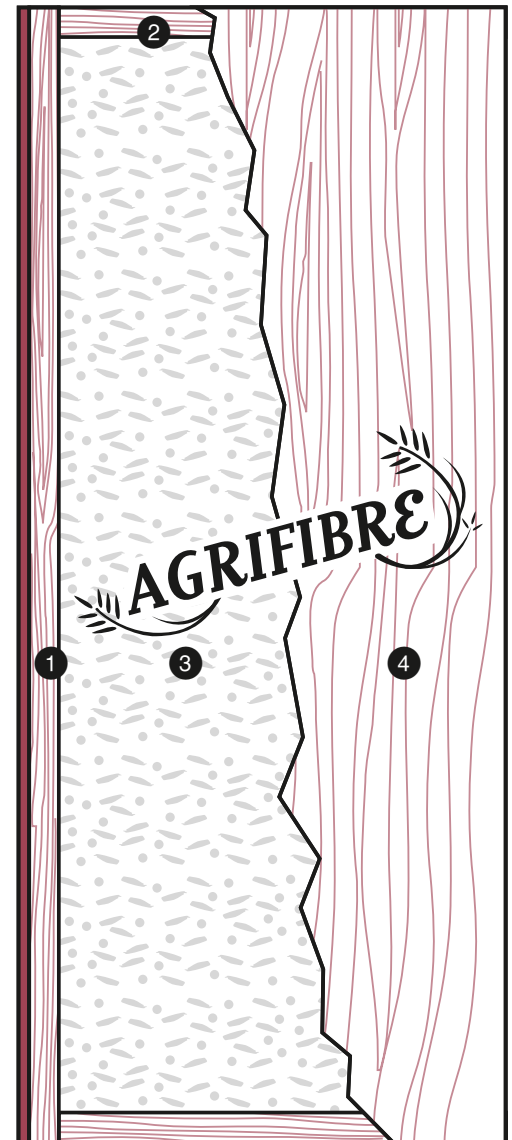


<b>LEED</b> ELIGIBLE CREDITS	M.R.		I.E.Q.		Standards meet or exceed: A.W.I./A.W.M.A.C. section 1300: 2.0 2005, W.D.M.A. 1.S.1A-04 and CSA 0132.2 90		
	4.1	4.2	5.1	5.2	6	7	4.4 (UFF)
	✓	✓	✓	✓	✓	**	***

### ❶ STILES MO/ME

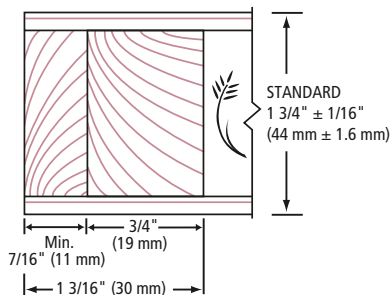

### ❶ STILES VE

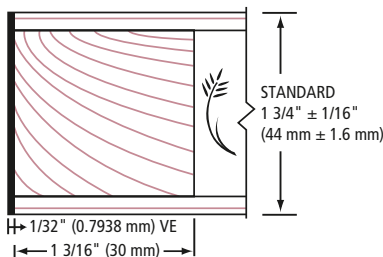

### ❷ RAILS

