

9100-MO (5 PLY)

HOLLOW CORE

- ❶ **STILES:** 1 3/16" (30 mm) clear, finger-jointed, low-density wood
- ❷ **TOP AND BOTTOM RAILS:** 1 3/16" (30 mm) low-density wood or SCL, manufacturer's choice (LVL or LSL)
- ❸ **CORE:** 4 3/4" (120 mm) honeycomb (100% recycled)
- ❹ **FACES:** Wood veneer (choice of face veneers: 2 ply plywood), hardboard panel or plastic laminate glued to composite crossband

LOCK BLOCK: Lock materials manufacturer's choice. Low-density wood parts 4 1/4" (108 mm) wide x 20" (508 mm) long (including stile)

GLUE: Type 1 PVA Cross-link (UFF)

INTERIOR USE


WARRANTY: 3 years

OPTIONS

- | Lock block on both sides
- | Wood veneer glued to veneer plywood (3 ply plywood)


NOTE

| Dimensions are nominal before trimming.

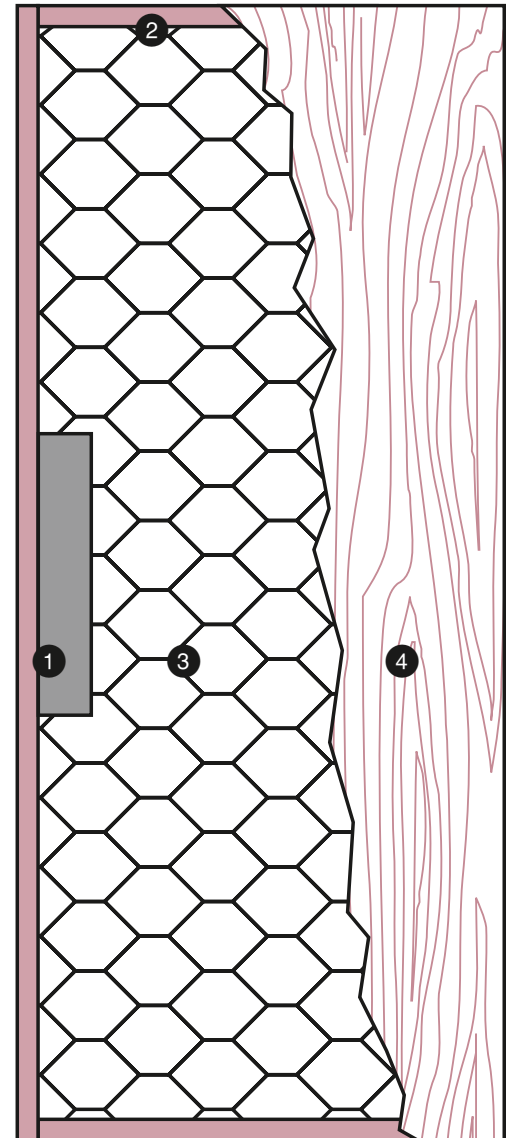

LEED ELIGIBLE CREDITS	4.1	4.2	M.R.		6	7	I.E.Q.
			5.1	5.2			4.4 (UFF)
			✓	✓			

❶ STILES MO

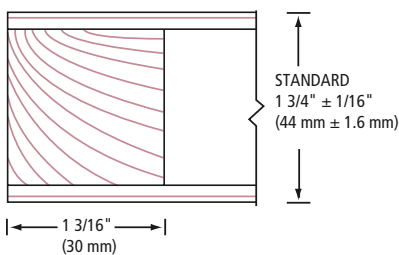

❷ RAILS

