

7600-ME

ULTRA HEAVY-DUTY CONSTRUCTION, 3 PLY LVL CORE FOR HIGH IMPACT INTERIOR USE

- ❶ **STILES:** 7/8" (22 mm) hardwood stiles **bonded to core**, matched with faces
- ❷ **TOP AND BOTTOM RAILS:** Integrated
- ❸ **CORE:** 3 ply, with 2 vertical plies composed of 1/8" (3 mm) thick veneer, longitudinally laminated by hot pressing with type 1 structural glue, as per ASTM-D5456-93 (LVL), rotary-cut poplar veneer with horizontal crossbanding of the same material. LVL is **FSC Certified** (UFF).
- ❹ **FACES:** Wood veneer (choice of face veneers: 2 ply plywood), hardboard panel or plastic laminate glued to composite crossband

Cold-pressing

GLUE: Type 1 PVA Cross-link (UFF)

WARRANTY: LIFETIME

OPTIONS

| 20 minute fire rating on 1 3/4" (44 mm) door only: specify 7620-ME

| Wood veneer glued to veneer plywood (3 ply plywood)

| Special high impact wood or steel moulding

| * To optimize M.R. 7, specify FSC wood veneer faces

| *** To get I.E.Q. 4.4, specify UFF wood veneer faces

NOTE


| Dimensions are nominal before trimming.



| | | | | | | | |
|------------------------------|------|-----|--------|-----|---|----|-----------|
| LEED ELIGIBLE CREDITS | M.R. | | I.E.Q. | | | | |
| | 4.1 | 4.2 | 5.1 | 5.2 | 6 | 7 | 4.4 (UFF) |
| | | | ✓ | ✓ | | ✓* | *** |

Standards meet or exceed:
A.W.I./A.W.M.A.C. section 1300: 2.0 2005,
W.D.M.A. 1.S.1A-04 and CSA 0132.2 90

❶ STILES ME

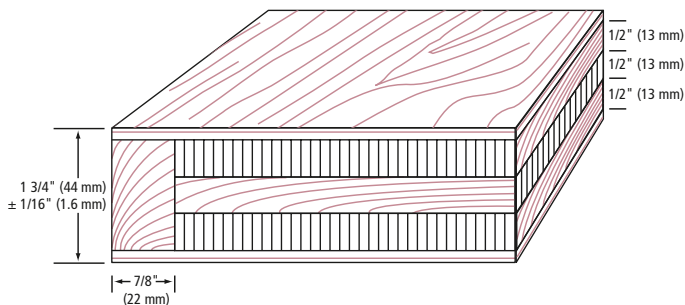

❷ RAILS INTEGRATED

